


Why Walls Buckle

1. Settling soil around the house
2. Poor building landscaping
3. Heavy steps creating pressure
4. Sloping concrete drives and patios

Over 90% of buckling wall problems are caused from #1 & #2.

The heavy soil gets wet, then expands, causing walls to push inward.


**Strong
Reliable
Secure
Permanent**

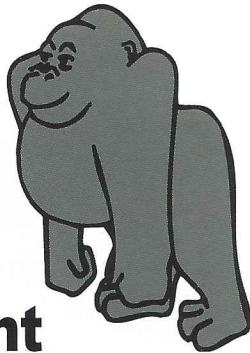

Advantages of using Gorilla® Wall Braces

1. Leading the competition
2. Will push wall back again
3. No digging up your yard
4. Requires less space to do installation
5. Can be installed year around
6. Less cost

Gorilla® Wall Braces Do The Job

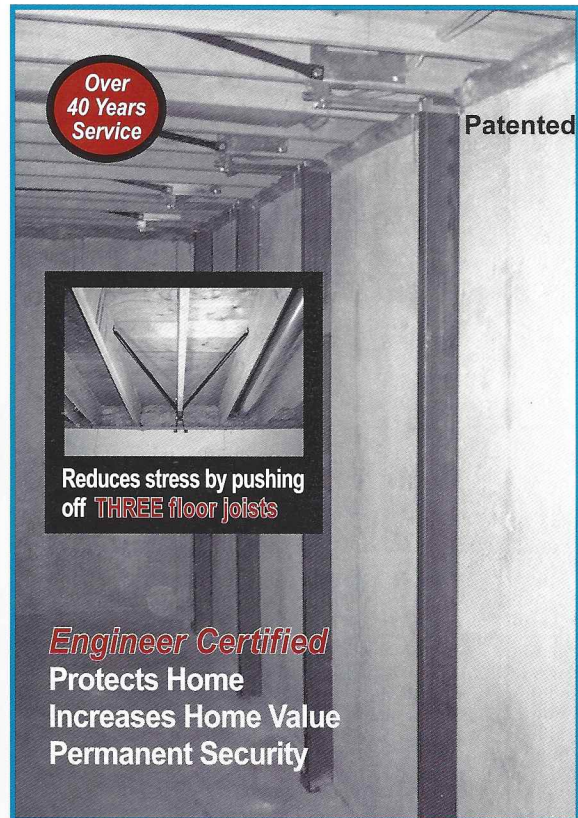

Important to Know

The steel brace is pushed with the pushing rod, applying enough pressure to start moving the wall back. The brace with continued pressure moves the wall back over a period of time. After the wall is pushed back the braces can be built into a finished wall.

**“Do it right the Gorilla® way”
We don’t monkey around.**