


MEMBRANE

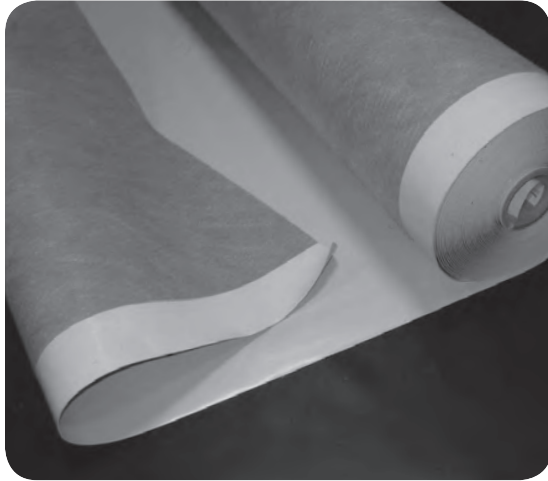

36 mil FiberTite-FB

Product Data

Seaman Corporation's 36 mil FiberTite-FB "fleece back" membrane features an 18 x 19 / 840 x 1,000 denier weft reinforced polyester knit fabric, coated with a proprietary compound, utilizing DuPont's™ Elvaloy® Ketone Ethylene Ester (KEE) as the principle polymer in the hybrid vinyl alloy coating.

DESCRIPTION

36 mil FiberTite-FB "fleece back" is a 30-oz sq. yd/nominal 36-mil (0.9 mm) thick membrane. In addition to exceeding the ASTM D 6754-02 Standard Specification for Ketone Ethylene Based Sheet Roofing's minimum standards, 36 mil FiberTite-FB meets or exceeds the physical properties and performance characteristics of most competitive 50-mil membranes.

The 36 mil FiberTite-FB membrane incorporates a 4-oz per sq. yd non-woven polyester felt, heat bonded to the back side of the membrane with a 3-in selvage edge for field welding. 36 mil FiberTite-FB is manufactured in conventional 72-in by 80-ft roll goods.

Seaman Corporation is vertically integrated, which allows complete control over the manufacturing process from the selection of the yarns, to the engineering, knitting and weaving of the base fabrics to the final coating process. Today, FiberTite Roofing Membranes are the result of Seaman Corporation's 60 years of applied fabric engineering and coating technology.

All FiberTite Roofing Membranes are constructed using high tenacity/heavy weight yarns to create a base fabric reinforcement to impart superior puncture, tensile and tear resistance properties. The base polyester fabrics are primed with a unique and proprietary adhesive coat that lays the foundation to physically bond the KEE coatings to the "fiber" to maximize seam strength and overall membrane performance.

36 mil FiberTite-FB is coated face and back with Seaman Corporation's original "KEE" formulation to provide superior hot air welding characteristics, extreme UV resistance, broad chemical resistance and long-term flexibility and reparability for the installed roofing membrane system. Additionally, 36 mil FiberTite-FB exhibits superior tear, puncture, fungus, algae and flame resistance that make FiberTite Roofing Systems some of the most sustainable roofing systems available.

PHYSICAL PROPERTIES

| ASTM D6754-02 | Minimum Requirements | 36 mil-FB Typical |
|---|----------------------|-------------------|
| Thickness, mm (in.) <i>ASTM D 751</i> | 0.79 (0.031) | .91 (0.036 nom.) |
| Thickness over Fiber, mm (in) <i>Optical method (inches)</i> | 0.15 (0.006) | .23 (0.009) |
| Breaking Strength, N (lbf) <i>ASTM D 751 proc. B - strip</i> | 1175 (265) | 1557 (350) |
| Elongation at Break, % <i>ASTM D 751 - strip</i> | 15 | 18 |
| Tear Strength, N (lbf) <i>ASTM D 751 Proc. B. Tongue Tear</i> | 335 (75) | 445 (100) |
| Linear Dimensional Change <i>ASTM D 1204 max (%)</i> | 1.3 | 0.63 |
| Fabric Adhesion, N/m (lbf/in) <i>ASTM D 751</i> | 225 (13) | no peel |
| Retention of Properties after Heat Aging <i>ASTM D 3045 - 176°/56 days</i> | | |
| Breaking Strength, strip, % original | 90 | 90 |
| Elongation at Break, strip, % original | 90 | 90 |
| Low Temperature Bend after Heat Aging | -30 | -30 |
| Low Temperature Bend <i>ASTM D 2136 (°f)</i> | -30 | -30 |
| Change in Weight after Exposure in Water <i>D 471 158°f, 166 h, one side only, max. (%)</i> | 0.0, +6.0 | 0.0, +3.7 |
| Factory Seam Strength, N (lbf) <i>ASTM D 751 Grab Method</i> | 1780 (400) | > Fabric Break |
| Hydrostatic Resistance, Mpa (psi) <i>ASTM D751</i> | 3.5 (500) | 4.8 (700) |
| Static Puncture Resistance <i>ASTM D 5602 (99 lbf)</i> | pass | pass |
| Dynamic Puncture Resistance (J) <i>ASTM D 5635</i> | 10 | 20 |



For more information on FiberTite Systems and accessories please call:
Seaman Corporation (800) 927-8578
International (330) 262-1111
www.fibertite.com

INTELLIGENT
ROOFING SOLUTIONS

FiberTite® is a registered trademark of Seaman Corporation.



Subject to the conditions of Approval for a roof covering when installed as described in the current edition of the Approval Guide.



As to an external fire exposure only. See UL directory of products certified for Canada and UL roofing materials and systems directory 34KL, 48P0, 97P9.



ESR-1456

36 mil FiberTite-FB

Product Data

APPLICATION

36 mil FiberTite-FB Roofing Systems are installed by adhering the “fleece back” membrane in FTR-290 low VOC solvent borne adhesive, FTR-390 water borne asphalt emulsion, FTR-490 water borne elastomeric adhesive or hot asphalt to a variety of pre-approved substrates.

For specific installation recommendations and requirements, please consult the most current versions of Seaman Corporation’s Guide Specifications for the Installation of FiberTite Roofing Systems.

PHYSICAL PROPERTIES (cont.)

| ASTM D6754-02 | Minimum Requirements | 36 mil-FB Typical |
|--|----------------------|-------------------|
| Accelerated Weathering <i>Practice G 155 / xenon</i> | 5000hr | >10000hr |
| cracking (7x magnification) | none | none |
| crazing (7x magnification) | none | none |
| Accelerated Weathering <i>Practice G 154 / UVA</i> | 5000hr | >10000hr |
| cracking (7x magnification) | none | none |
| crazing (7x magnification) | none | none |
| Fungi Resistance <i>Practice G 21, 28 days</i> | no growth none | no growth none |
| Sustained Growth Discoloration | | |
| Abrasion Test, cycles <i>D 3389 H-18 wheel / 1,000 g load</i> | 1,500 | 1,500 |
| Additional Physical Properties | | |
| Tensile Strength (psi) <i>ASTM D882</i> | 8500 | |
| Breaking Strength (lbs) <i>ASTM D751, Grab Method</i> | 450 | |
| Puncture Resistance (lbs) <i>ASTM D751, Bursting Strength</i> | 350 | |
| Water Vapor Transmission <i>ASTM E96 proc. A (gm/m²/24hrs)</i> | 1.3 | |
| Shore A Hardness <i>ASTM D2240</i> | 87 | |
| Flame Resistance <i>MIL-C-20696C / Type II Class 2</i> | pass | |
| Oil Resistance, MIL-C 20696C <i>No swelling, cracking or leaking</i> | none | |
| Hydrocarbon Resistance, MIL-C-20696C <i>No swelling, cracking or leaking</i> | none | |
| High Temperature Dead Load <i>ASTM D751 (50 lbs, 160°F, 4 hrs)</i> | pass | |
| Energy Attributes (Color DC196 Off-White) | | |
| Solar Reflectance <i>ASTM E903</i> <i>ASTM E1918</i> | 79% 83% | |
| Solar Reflectance (3 yr aged) <i>ASTM C1549</i> | Un-Cleaned 66% | Cleaned 78% |
| Solar Emittance <i>ASTM E408</i> <i>ASTM C1371</i> | 95% 85% | |
| Solar Emittance (3 yr aged) <i>ASTM C1371</i> | Un-Cleaned 74% | Cleaned 81% |
| Energy Star | yes | |
| Solar Reflective Index (SRI) <i>ASTM E1980</i> | 98.54 | |
| LEED 2.2 - Heat Island Effect <i>SS Credit 7.2</i> | 1 Credit | |



INTELLIGENT
ROOFING SOLUTIONS